

Two Frame Options

WindSigns

Choose Snap Frame or Quick-Change™ Frame

Snap Frame



- Snap open, place graphic, snap close
- Satin silver or gloss black frame
- PVC Clear Protective Cover
- Use indoors and out
- Tool free assembly

Clear cover is provided to keep poster clean. When used outdoors, weatherproof sign material should be used.

Quick-Change™ Frame






- Patented slot design - just slide in a sign
- All plastic frame
- "Stay Tabs" keep sign securely in place
- Use indoors and out
- Tool free assembly

Both Frame Options Have Same Heavy-Duty Base and Springs



All plastic base with two built-in wheels. Can be filled with dry sand.


Coil springs resist strong winds and return the sign to an upright position.

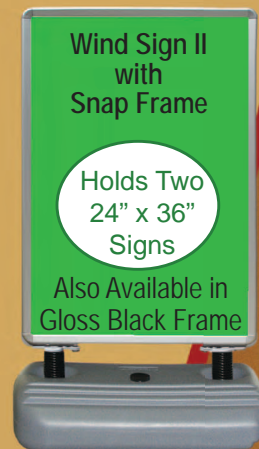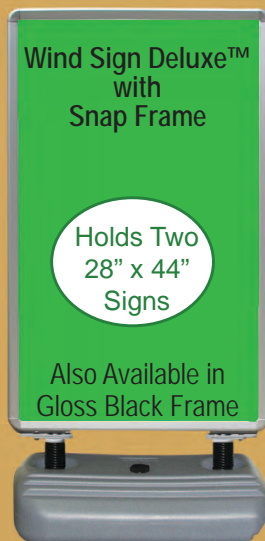


WindSigns

Specifications	Wind Sign "Quick-Change"™ Frame	Wind Sign II "Quick-Change"™ Frame	Wind Sign II Snap Frame	Wind Sign Deluxe™ "Quick-Change"™ Frame	Wind Sign Deluxe™ Snap Frame
Color	Gray	Gray	Satin Silver or Gloss Black Aluminum Frame with gray base	Gray	Satin Silver or Gloss Black Aluminum Frame with gray base
Dimensions (Frame Only)	32.75"H x 24"W x 2.5"D	42.9"H x 26"W x 2.5"D	38"H x 26.1"W x 1.3"D	51"H x 30"W x 2.5"D	46"H x 30"W x 1.3"D
Dimensions (Base Only)	4.5"H x 26"W x 18"D	7.1"H x 28.7"W x 18.1" D	7.1"H x 28.7"W x 18.1" D	7.1"H x 28.7"W x 18.1" D	7.1"H x 28.7"W x 18.1" D
Dimensions Assembled	40"H x 26"W	53"H x 28.7"W	43.2"H x 28.7"W	61"H x 30"W	57"H x 30"W
Total Weight Assembled	16 lbs.	25 lbs.	29 lbs.	30 lbs.	33 lbs.
Weight (Base Only)	4.3 lbs.	9 lbs.	9 lbs.	9 lbs.	9 lbs.
Base Sand Ballasting	Use a max. of 85 lbs. of dry sand	Use a max. of 115 lbs. of dry sand	115 lbs. of dry sand is recommended	Use a max. of 115 lbs. of dry sand	115 lbs. of dry sand is recommended
Sign Insert Size	22" x 28" (3/16" thick max.)	24" x 36" (3/16" thick max.)	24" x 36" (3/16" thick max.)	28" x 44" (3/16" thick max.)	28" x 44" (3/16" thick max.)
Sign Insert Weight Limit	2.5 lbs. per side	5 lbs. per side	5 lbs. per side	5 lbs. per side	5 lbs. per side


Wind Sign




Wind Sign II "Quick-Change"™ Frame




Wind Sign Deluxe™ "Quick-Change"™ Frame



Wind Sign II Snap Frame

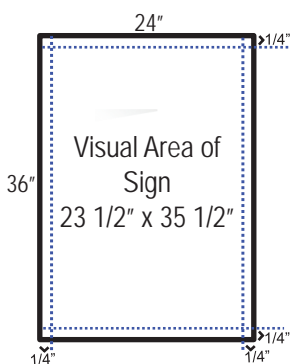

Wind Sign Deluxe™ Snap Frame

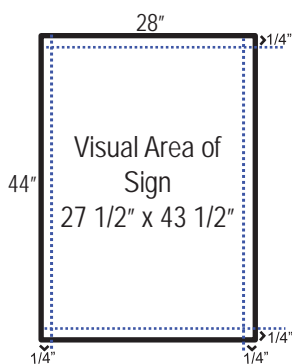

Sand Ballasting Instructions
For Wind Sign Deluxe and Wind Sign II
Unscrew cap from fill hole and fill with dry sand. Sand should be level inside of base to maintain optimum balance. Shake gently to level sand.



To obtain desired wind resistance for "Quick-Change" Frames, use the charts below

Wind Sign Deluxe™ with "Quick-Change" Frame		Wind Sign II with "Quick-Change" Frame	
Pound of Ballast	Head-on Wind Resistance	Pound of Ballast	Head-on Wind Resistance
70 lbs	40 mph	70 lbs	40 mph
100 lbs	45 mph	100 lbs	55 mph
115 lbs	50 mph	115 lbs	60 mph

US PATENT 7,337,569
Other Patents Pending

PLASTICADE®

7700 Austin Avenue
Skokie, IL 60077
phone (800) 772-0355
fax (847) 966-8074
www.plasticade.com

Slide in a Message Board...



Available for Wind Sign, Wind Sign II, and Wind Sign Deluxe™

or a Marker Board



Available for Wind Sign and Wind Sign II