

Simpo[®] Square 24

PLASTICADE[®]




New Hinges Hold a Sign Rider! Perfect for Real Estate Signs

- Holds two 24" x 24" signs
- Change signs in seconds
 - "Quick-Change"[™] feature, signs easily slide in and out
 - use Coroplast[™] signs or other material 3/16" or less
- "Stay Tabs" assure sign stays securely in place
- Grabber Hinges hold a Sign Rider
 - keep frame from opening too far
- Textured feet
 - help to secure frame on smooth surfaces
 - dig into soft ground or gravel
- No rust, no maintenance
 - all plastic, use indoors and out
- Internally ballast with up to 6 lbs. of dry sand



Patented slot design
-just slide in a sign

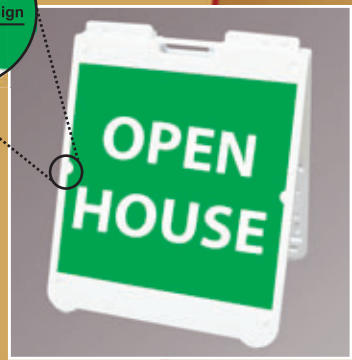

"Stay Tabs" keep sign
securely in place



Grabber Hinges
grip Sign Rider,
quickly holding it
in place

Holds 24" x 24" Sign Blanks

Simpo[®] Square 24

Sign Blank Size: 24"W x 24"H

Outside Dimensions: 26"W x 32.3"H


Closed Thickness: 2"

Weight: 5 lbs.


Colors: White and Black

Can use all sign blanks up to 3/16" thick, including

Coroplast[™], foamboard, and aluminum.

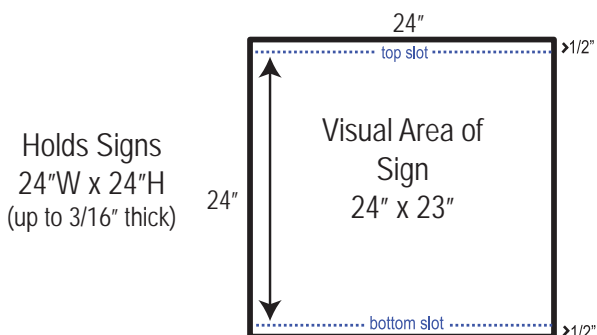

Sand Ballasting Instructions




Sand Fill Hole


Each sign frame has two fill holes, one on each half of the frame.

Remove plug from fill hole and fill each hole with dry sand. 3 lbs. of sand per hole for a total of 6 lbs. per sign frame is recommended.


Sign Insertion Instructions:



1. Slide sign down through the tabs



2. Slide through, pulling sign in front of bottom slot until sign hits the ground



3. Push sign up into top slot



4. Slide sign down into bottom slot

MADE IN THE USA

PLASTICADE[®]

7700 Austin Avenue
Skokie, IL 60077
phone (800) 772-0355
fax (847) 966-8074
www.plasticade.com

Sign Rider Insertion Instructions:

Stand the sign frame on the ground, spreading open the sign faces only half way. Place the Sign Rider in the hinge openings between the sign faces. Now, move the sign faces apart until fully extended. The hinges will "grab" the Sign Rider.

